

ClearRoom™ 800 Solution

Room Conferencing Solution

ClearOne®

Minimize the effort required to specify, install and configure a complete professional quality audio system for conferencing. To utilize this solution, simply load the associated system site file into the Converge Pro system and connect the included microphones, speakers and controller.



THE CLEAR CHOICE FOR PROFESSIONAL AUDIO CONFERRING

APPLICATIONS

- + Conference Rooms
- + Teleconferencing
- + Boardrooms
- + Hearing Room
- + Video Conferencing
- + Distance Learning Classroom

BENEFITS

- + Complete Audio Solution
- + Solution includes:
 - > ClearOne Converge™ Pro 880TA
 - > ClearOne Tabletop Controller
 - > (4) ClearOne LS6CT Ceiling Speakers
 - > (8) ClearOne Table Mics
- + Best-In-Class Audio System
- + Easy to Use and Easy to Install
 - > Unified Control System
 - > Pre-configured
- + Easy to Maintain
 - > Remote management
 - > Full Diagnostics
- + Easy to Expand
 - > Links to other Converge Pro units
 - > Easily add additional loudspeakers
 - > Control via third party systems such as Crestron and AMX

FEATURES

- + Converge™ Pro 880TA Audio System
 - > (8) AEC Channels
 - > 4x35 watt
 - > Integrated Telephone Hybrid
 - > Pre-defined Site file
 - > Sample drawings
- + ClearOne Tabletop Controller
 - > Telephone dialing
 - > Room volume controls
- + ClearOne Ceiling Speakers
 - > Full bandwidth, high power and high sensitivity
- + ClearOne Table Mics
 - > Uni-directional
 - > Full band
 - > XLR connector
 - > XLR - Phoenix pigtail connectors

> ClearRoom 800 Solution

Converge™ Pro 880TA Mixer

Frequency Response: 20 Hz to 22 kHz ± 1 dB
 THD+N: <0.02%
 Dynamic Range: 100 dB (non A-weighted)
 Processing: AEC, NC, AGC, Gating, NOM, Compressor, Limiter, Filters
 Mic Inputs: (8) Balanced
 Line Inputs: (4) Balanced
 Line Outputs: (8) Balanced
 PA Outputs: (4) 8 Ω or 70/100V
 Telephone: (1) Set, (1) Line

ClearOne Uni-directional Microphone

Number included: 8
 Coverage: Uni-directional
 Connection: XLR - Balanced
 Frequency Response: 50 - 18 kHz
 Microphone Sensitivity: -65 dBu

Wired Installed Controller

RS-232 Interface
 Custom programming with Controller Builder
 Telephone Dialing
 Room Audio Controls

ClearOne LS6CT Ceiling Speaker

Number included: 4
 Frequency Response: 60Hz to 20 kHz
 Driver: 6"
 Transformer Taps: 70V: 30W, 15W, 7.5W, 3.8W, 1.9W, 8 ohms
 100: null, 30W, 15W, 7.5W, 3.8W, 8 ohms

Management & Control

Integrated HTTP Server
 SNMP Agent
 Automatic System Checks
 Telnet

Environmental

Operating Temperature
 32° F/-1.7° C to 122° F/50° C

Humidity
 15% to 80%


Compliance

EMC - FCC Part 15 Class B
 EMI - EN55024
 Safety - IEC60950, CSA, CCC

Part Numbers

ClearRoom 800 Solution
 930-151-800
 Converge Pro 880TA ROHS
 910-151-882
 Tabletop Controller ROHS
 910-151-890
 Cable/Mic Accessory Kit
 910-151-801

Sample Application

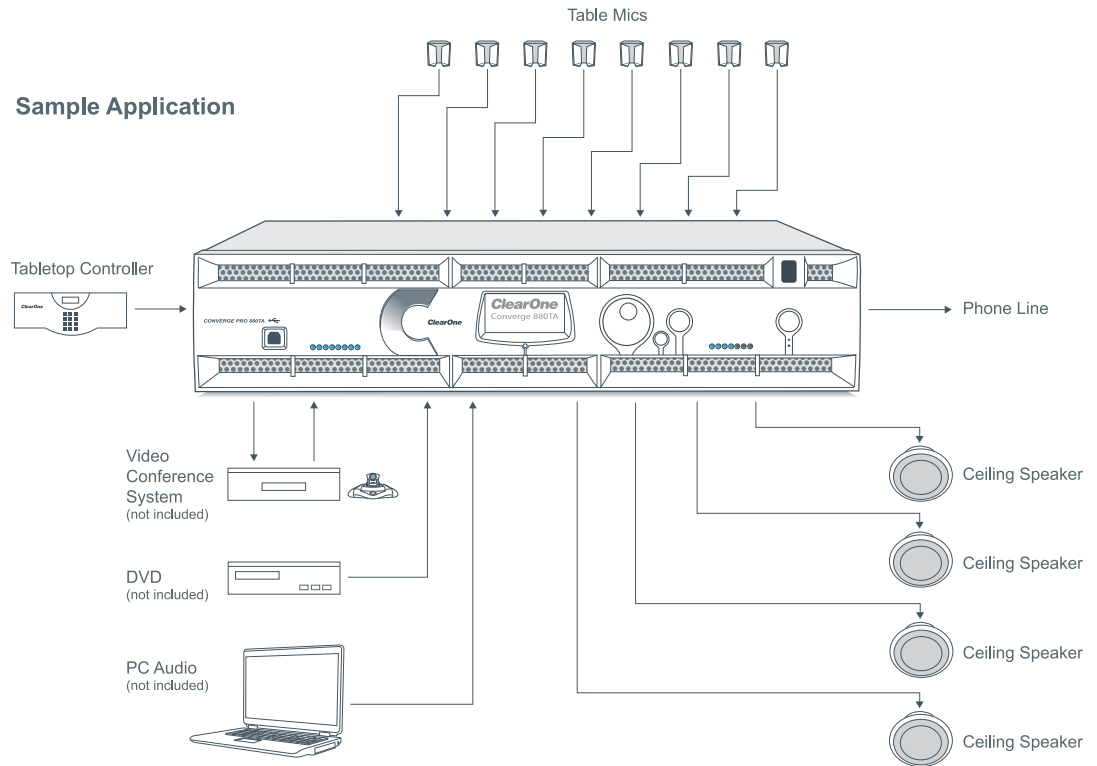

Speakers Ceiling mnt (1 pr) LS6CT 6'
 W/Transformer Packaged
 910-151-001
 Cable Spkr 18 AWG Clear C-240 50'
 693-153-050
 Cable Assy XLR 3-pin F To Euro 3-pin
 F 24"
 830-151-800
 Mic Kit Uni Table Top W/Cable
 910-103-161

> CLEARONE LOCATIONS

Headquarters:

Salt Lake City, UT USA
 5225 Wiley Post Way
 Suite 500
 Salt Lake City, UT 84116
 Tel: 801-975-7200
 Toll Free: 800-945-7730
 Fax: 801-977-0087
 sales@clearone.com

Latin America

Tel: 801-974-3621
 global@clearone.com

EMEA

Tel: 44 (0) 1189 036 053
 global@clearone.com

APAC

Tel: 801-303-3388
 global@clearone.com